

OPL25N

Low-level Order picker

OPL25N is a low-level order picker that has strong power and better stability when increasing or decreasing speed thanks to the German AC drive and Italian Controller. Plus its electric steering system and German REMA multi-functional handle make it has high working efficiency and driving comfort.

4 point structure floating shock absorption platform and rubber pads minimize the vibration. The ergonomically curved backrest can efficiently avoid driver's fatigue; Sideways battery design allows quick and easy replacement in multi shifts working.

Fully upgraded features make picking easier and more efficient and it provides various optional configurations such as extension bracket, caution light, blue light, entry rollers, storage tray, double USB charging port. etc.



NOBLELIFT
Material Handling

We promise, We deliver

OPL25N

Low-level Order picker



Noblelift Headquarters

Add:#528 Changzhou Road, Taihu
Sub-district, Changxing, 313100, China
TEL: +86 572 6210311 / 6120989
FAX: +86 572 6129336
WEB: www.noblelift.com
Email: info@noblelift.com



Official website



Our Wechat

Noblelift North America Corp.

Add: 2461 S Wolf Road, Des Plaines, IL 60018
Tel: 847-595-7100
Fax: 847-595-7200
Email: sales@nobleliftna.com
Http: www.nobleliftna.com

Noblelift Europe GmbH

Add: Borsigstrasse 9d-93092 Barbing
Germany
TEL: +49 9401 607930
FAX: +49 9401 6079329
WEB: www.noblelifteurop.com
Email: mail@noblelifteurope.com

Noblelift Russia

ООО "Ноблелифт Рус"
194292, Санкт-Петербург
Домостроительная ул. 4А офис 301
Бизнес-центр "Парнас"
тел.: +7 (800) 700-28-97
Email: sales@noblelift.com.ru

NEW / *Noblelift Products*
ARRIVAL

ISO9001 / ISO14001

// 2020.06

NOBLELIFT INTELLIGENT EQUIPMENT CO., LTD

www.noblelift.com


OPL25N Highlights

Display whole truck condition information via control instrument and multifunctional handle



German REMA multifunctional handle

Reliable and ergonomically designed REMA handle' each button can be easily reached and controlled, which makes driving more comfortable.

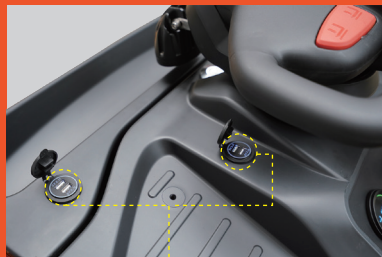

USB charging port

Double USB charging port power up more equipment.



The multifunctional control instrument can display truck conditions, battery capacity, working time, travel speed, and steering angle. When something goes wrong, the outer ring light of the instrument will turn to red from blue.



The standard pin code switch can set multiply start passwords, the ID card is also supported to start the truck.

Robust and durable structure, high power and efficient driving technology



German AC drive technology

AC drive system performs perfectly thanks to its high power maintenance-free Geman Schab-muller AC drive motor and KORDEL gearbox while smoothly increasing or decreasing speed.




Italian ZAPI Controller

Provide clients with reliable, flexible and high-performance control system solution as adopting Italian ZAPI drive controller.



High power and performance pump

Make lift easier and efficient by using high power and performance pump.



German drive wheel ring has a long service life, high load, and is not easy to wear.

Well-designed and easy to maintain



Sideways battery exchange compartment plus adjustable handling bracket makes battery replacement easier and quicker.



A variety of extension supports are available to meet the installation requirements of different extension equipment, such as WMS display, barcode scanner, storage tray, file plywood, etc.



The upper adjustable balance wheel can realize the easy adjustment of the balance wheel.




Easier to entry Australian pallet with entry rollers.



The jog button on both sides of the truck allows the operator to operate truck forward/ backward or lift the fork while walking beside. There is no need for the operator to get in and out of the truck frequently to operate it. That greatly improved the picking efficiency and operation safety by reducing the speed controlled by the jog button.

Other optional parts

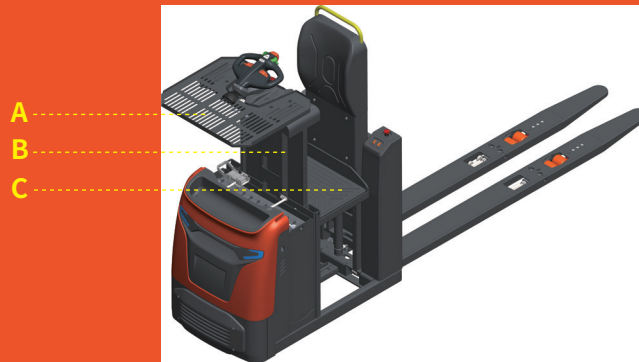

A: The storage platform used with the lifting operation platform allows putting or retrieving more cargo and make work more efficient.

B: The operation platform can be lifted to the second rack which allows picking or retrieving more efficient.

C: Operating platform descent by using footswitch releases the hands to make more work.

Safe and comfortable, easy storage





The standard blue light does not only automatically lit while the ruck forward-ing but also follows the handle to turn while the truck turns. It greatly improves the safety of the operation.



Safety flanks and non-slip surface materials on both sides of the backrest ensure the operator not to be thrown off while the truck turns at high speed. This design greatly improves the safety of driving. Meanwhile, the handle above the backrest provides a grasping point for the operator when get up or down the truck, provides superior comfort for the operator.



Large storage tray can be used for storing stretch film, art knife, marker pen, or other tools.

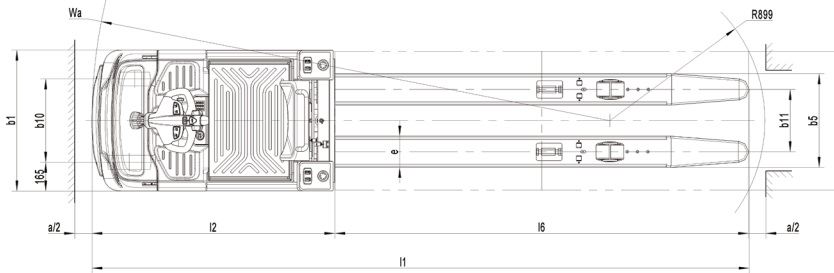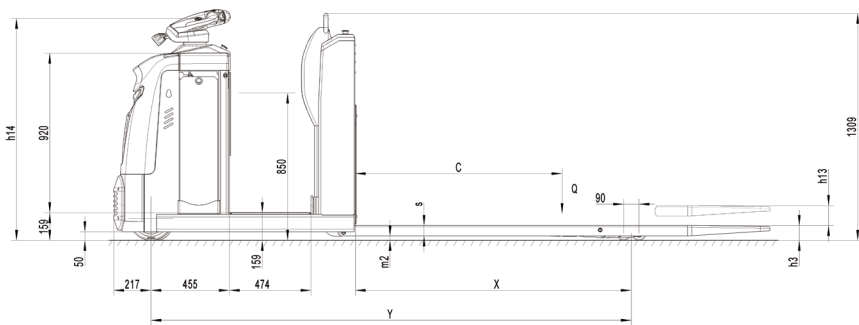

Type sheet for industrial truck acc. to VDI2198

| Distinguishing mark | | | |
|---------------------|---|------------|-----------------------|
| 1.2 | Manufacturer's type designation | | OPL25N |
| 1.3 | Drive | | Battery |
| 1.4 | Operator type | | Order-pucker |
| 1.5 | Load capacity/Rated load | Q (t) | 2.5 |
| 1.6 | Load center distance | c (mm) | 1200 |
| 1.8 | Load distance, the centre of drive axle to fork | x (mm) | 1535 ¹⁾ |
| 1.9 | Wheelbase | y (mm) | 2723 ¹⁾ |
| Weight | | | |
| 2.1 | Service weight | kg | 968 |
| 2.2 | Axle loading, laden front/rear | kg | 1290 / 2530 |
| 2.3 | Axle loading, unladen front/rear | kg | 980 / 340 |
| Tires, chassis | | | |
| 3.1 | Tires | | Polyurethane(PU) |
| 3.2 | Tire size,front | Øxw (mm) | Ø 250×80 |
| 3.3 | Tire size,rear | Øxw (mm) | Ø 82×82 |
| 3.4 | Additional wheels(dimensions) | Øxw (mm) | Ø 180×80 |
| 3.5 | Wheels,number front/rear(x=driven wheels) | | 1+1x/4 |
| 3.6 | Tread,front | b10 (mm) | 480 |
| 3.7 | Tread,rear | b11 (mm) | 360 |
| Dimensions | | | |
| 4.4 | Lift | h3 (mm) | 115 |
| 4.9 | Height of tiller in drive position min./max. | h14 (mm) | 1280 |
| 4.15 | Height, lowered | h13 (mm) | 85 |
| 4.19 | Overall length | l1 (mm) | 3770 ²⁾ |
| 4.20 | Length to face of forks | l2 (mm) | 1370 ²⁾ |
| 4.21 | Overall width | b1 (mm) | 810 |
| 4.22 | Fork dimensions | s/e/l (mm) | 60/ 180 / 2400 |
| 4.25 | Width across forks | b5 (mm) | 540 |
| 4.32 | Ground clearance, centre of wheelbase | m2 (mm) | 25 |
| 4.34 | Aisle width for pallets 800 x1200 lengthways | Ast (mm) | 3970 ^{3) 4)} |
| 4.35 | Turning radius | Wa (mm) | 2965 ³⁾ |
| Performance data | | | |
| 5.1 | Travel speed,laden unladen | km/h | 9 / 12 |
| 5.2 | Lift speed,laden/unladen | mm/s | 40 / 64 |
| 5.3 | Lowering speed,laden/unladen | mm/s | 60 / 40 |
| 5.8 | Max. gradeability, laden/unladen | % | 6 / 12 |
| 5.10 | Service brake | | Eletromagnetic |
| Electric-engine | | | |
| 6.1 | Drive motor rating S2 60min | kW | 2.6 |
| 6.2 | Lift motor rating at S3 10% | kW | 2.2 |
| 6.3 | Battery acc. to DIN 43531/35/36A,B,C,norm | | No,3PzS |
| 6.4 | Battery voltage,nominal capacity K5 | V / Ah | 24 / 465 |
| 6.5 | Battery Weight | kg | 352 |
| 6.6 | Energy consumption acc. to VDI cycle | kWh/h | 0.7 |
| Additional data | | | |
| 8.1 | Type of drive control | | AC speed Control |
| 8.4 | Sound level at driver's ear acc. to EN 12053 | dB(A) | <70 |

1)、After the fork descent x=1600mm, y=2788mm; 2)、Install crash pads l1=3810mm, l2=1409;

3)、Install crash pads Wa=3005mm, Ast=4010mm;

4)、According to the VDI diagonal algorithm Ast=original measurement+94mm。